



WirelessIP5000 USB Manual (v2.0.0)

1. USB MANAGEMENT1

1.1 SUMMARY.....1

1.2 INSTALLING AND STARTING UP WIPMANAGER1

2. EXPLANATION OF FUNCTIONS3

2.1 BACKING UP THE PHONEBOOK3

2.2 RESTORING THE PHONEBOOK4

1. USB Management

1.1 Summary

USB Management can be performed by connecting the WirelessIP5000 and the management PC via USB.

Phonebook backup: Saves the data from the WirelessIP5000 Phonebook to the PC in CSV format.

Phonebook restore: Restores the PC edited phonebook data to the WirelessIP5000 in CSV format

1.2 Installing and Starting Up WipManager

Connect the PC and WirelessIP with the supplied USB cable.(Figure 1)

Copy the USBManager folder to the PC. As long as the file is saved within the PC, the location does not matter.

```
/USBManager/drv/wipcom.inf/USBManager/drv/wipcom.inf  
/USBManager/drv/wipcom.inf/USBManager/drv/wipcom.inf  
/USBManager/drv/wipcom.sys... USB Driver
```



Figure-1

Check using the device manager that the WirelessIP driver (wipcom.sys) has been installed. When the driver has been successfully installed, the WirelessIP Virtual ComPort USB Driver will be added to the computer's ports (COM and LPT). (Figure 2). If this was not installed, remove and replug the USB cable. Confirm that the message that a new device has been found is displayed, and reinstall the Wireless IP driver (wipcom.sys) from the device manager.

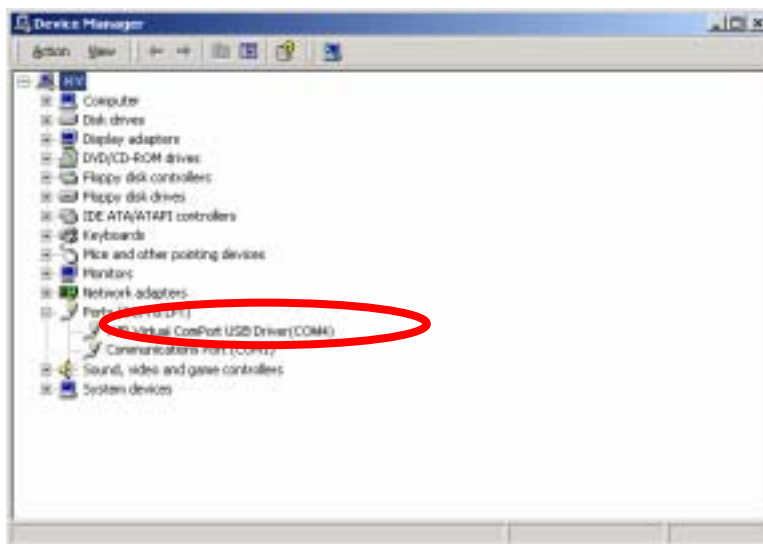


Figure 2

Run the file USBManager.exe (Figure 3)

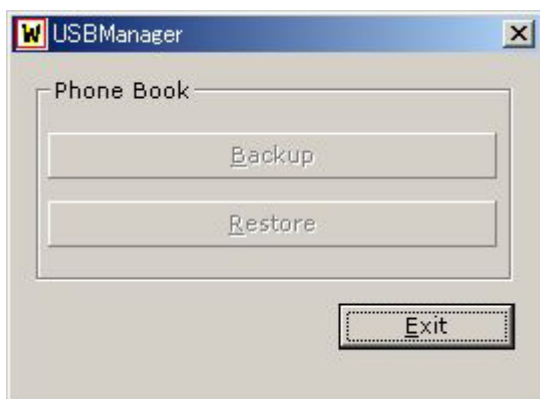


Figure 3

2. Explanation of Functions

2.1 Backing Up the Phonebook

Connect the WirelessIP5000 to the PC using the supplied USB cable.

Run the file USBManager.exe. If the operation buttons are grayed out, please install the driver.

Select the "Backup" button.

Specify the location where the Phone book data is to be saved, enter a name for the Phone book data file and press the Save button. (Figure 4)

Confirm that the Phone book data has been successfully backed up. (Figure 5)

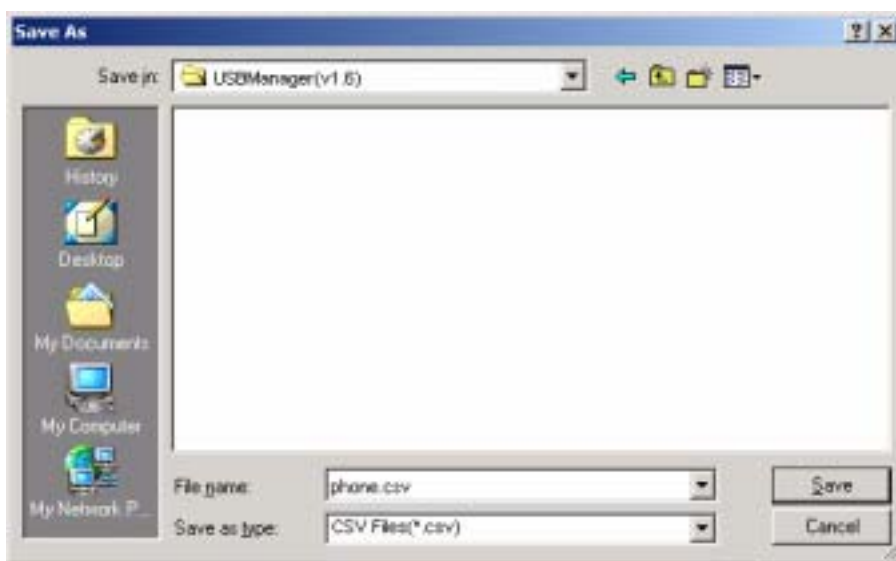


Figure 4

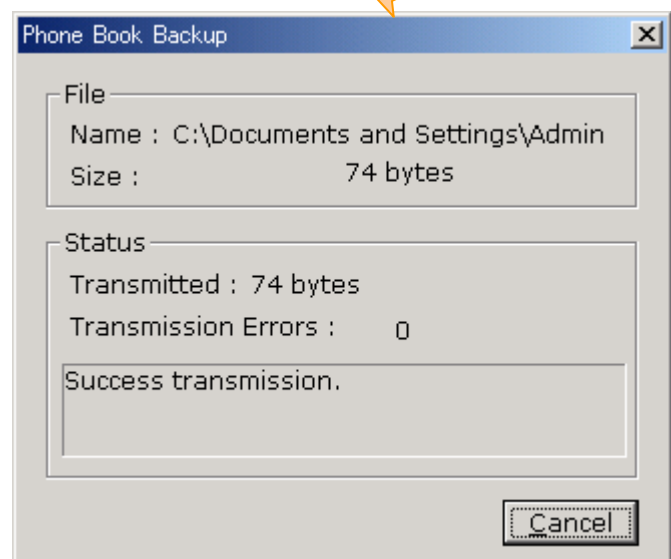


Figure 5

2.2 Restoring the Phonebook

Connect the WirelessIP5000 to the PC using the supplied USB cable.

Run the file USBManager.exe. If the operation buttons are grayed out, please install the driver.

Select the “Restore” button.

Select the file to be restored and select the “Open” button. (Figure 6)

Confirm that the phonebook data has been successfully backed up. (Figure 7)

Finally, select “Reboot” and reboot WirelessIP5000.

After restarting, the operation button will be grayed-out.

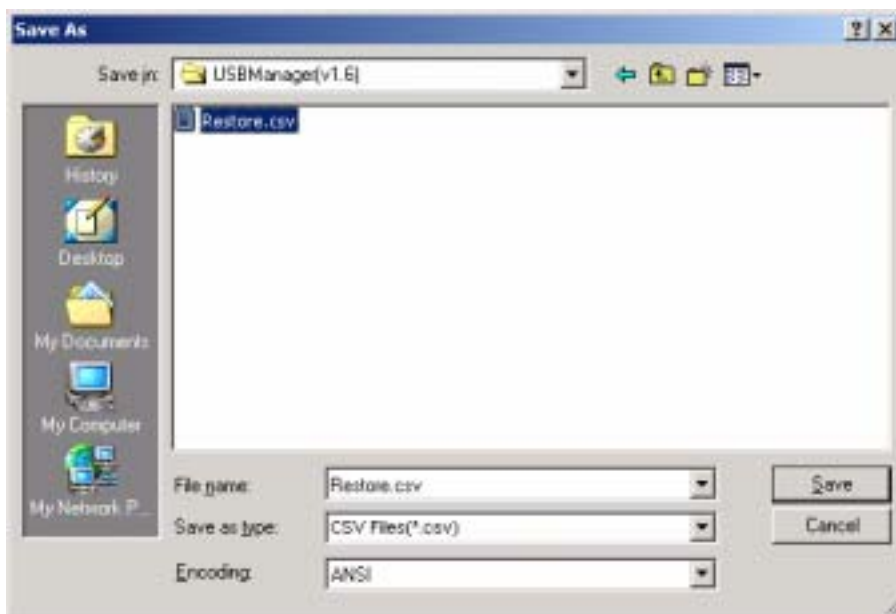


Figure 6

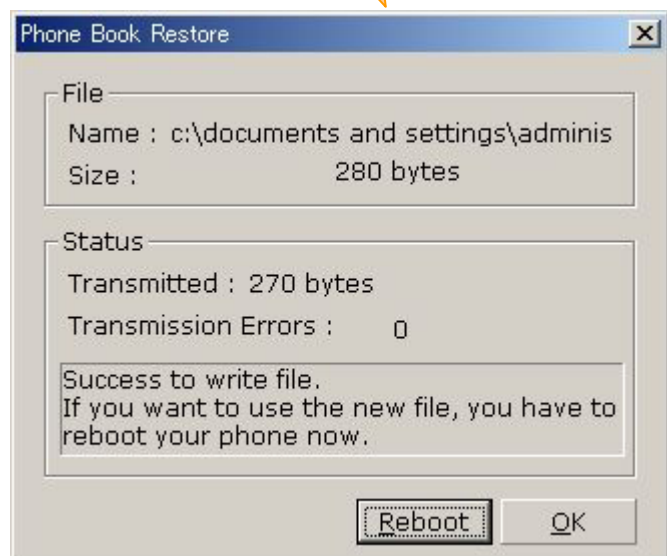


Figure 7

Copyright© 2005

Hitachi Cable, LTD.

Otemachi Building, 6-1 Otemachi 1-chome,
Chiyoda-ku, Tokyo 100-8166, Japan

First Edition, August 2005